

product introduction

The LLPX Series is Smart Vision Lights second generation of LLP backlights that allows for more intensity with the same familiar ease of mounting. With its new optically clear internal light dispersion grid and matte white finished backing plate more light is reflected up and out through the diffusion acrylic. The LLPX Series new Multi-Drive™ driver allows users to OverDrive this product for that extra burst of intensity or operate it in constant ON.


product features



- Large LED Backlight With 30mm Frame Profile
- Driver Built In – No External Wiring To A Driver
- M12 Quick Disconnect
- Edge Lit LED Panel
- PNP and NPN Strobe Input
- Custom Sizes/Hole Placement Options
- Continuous Operation or OverDrive Strobe Mode

constant ON product specs

Wiring configuration for **CONSTANT ON** operation

	Pin	Function	Signal	Wire Color
	1	Power In	+24VDC	BROWN
	2	NPN	Ground (common)	WHITE
	3	GND	Ground	BLUE
	4	PNP	> 4VDC	BLACK
	5	Intensity Control	1-10VDC	*GREY

* Some cables use green with yellow stripe for 1-10V adjustment.

Electrical Input	24 VDC +/- 5%
Current	306x306 = .8 – 1.2A / 459x459 = 1.2 – 1.8A <i>NOTE: current is LED color dependent</i>
Wattage	306x306 = 19.2 – 28.8W / 459x459 = 29 – 43W
Strobe Input	PNP ▶ +4VDC or greater to activate. NPN ▶ GND (<1VDC) to activate
PNP Line	6.2mA @ 5VDC 12.6mA @ 10VDC 30.4mA @ 24 VDC
NPN Line	22mA @ Common (0VDC)
Continuous Mode	Light will be in continuous mode by leaving signal on strobe input active – <i>analog dimming is active</i>
Connection	5 pin M12 connector
Lifespan	100,000 hrs
IP Rating	IP50
Certification	CE and RoHS certified
IEC 62471 Rating	See page 3 for details
Weight	306x306 = 2.5kg / 459x459 = 3.8kg
Ambient Temperature	-40° - 50° C (-40° - 122° F)



Wiring configuration for OverDrive operation

	Pin	Function	Signal	Wire Color
	1	Power In	+24VDC	BROWN
	2	NPN	Sinking Signal	WHITE
	3	GND	Ground	BLUE
	4	PNP	Sourcing Signal	BLACK
5	OverDrive Signal	Ground	GREY	

Electrical Input	24 VDC +/- 5%
Current	306x306 = 3.2A Peak, .32A Average @10% DC / 459x459 = 4.8A Peak, .48A Average @10% DC
Wattage	306x306 =7.7W / 459x459 = 11.6W
Strobe Input	PNP ▶ +4VDC or greater to activate NPN ▶ GND (<1VDC) to activate 5µS LED activation time
PNP Line	3.7mA @ 3VDC 6.2mA @ 5VDC 12.6mA @ 10VDC 30.4mA @ 24 VDC
NPN Line	22mA @ Common (0VDC)
OverDrive Mode	Connect Pin 5 to GND (more info. in wiring configuration) - <i>analog dimming is inactive</i>
Duty Cycle	Max.10%
Strobe Duration	Max. 125mS



product number key

LLPX -XXX x XXX - XXX

Product Family:
Light Panel
LLPX Series

Size:
306x306
459x459
*Custom Sizes
upon Request*

Color:
470 - Blue
530 - Green
625 - Red
WHI - White

—» Part Number Key

CE and RoHS Compliant



warnings



Attention

Please note that the power requirements vary according to size. Failure to supply each unit with its correct amount of current will result in non-repeatable lighting. Contact Smart Vision Lights for more information.




mounting & accessories





Each LLPX Series backlight is constructed using Smart Vision Lights own proprietary made 30mm black anodized extrusion with 8mm T-Slot.

Drop in T-nuts make for quick and easy mounting or utilize the four corner cubes.

Complete mounting hardware is available upon request.



optical performance

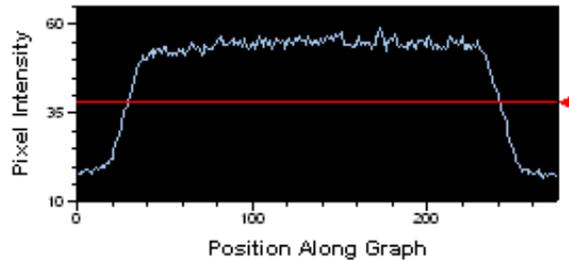

The LLPX offers a very diffuse light pattern at any defined working distance. The Pixel Graph representation shows a steep drop off in intensity outside of the active area with a very diffuse light pattern inside.

Average Intensity	8,000 lux
--------------------------	------------------

*Lux measurement taken at surface of LLPX.



risk group

According to IEC 62471:2006. Full documentation upon request.

Notice

Exempt Group: No photobiological hazard to eyes or skin even for continuous, unrestricted use.
Applicable for wavelengths: 470, 530, 625 and WHI.